



MDG - 80

Application areas: agriculture, earth moving


Type: leveler
 Min. required power: 280 HP
 Max required power: 500 HP
 Overall length: 8,28 m
 Overall width: 8,00 m
 Working width: 8,00 m
 Maneuver width: 2,50 m
 Work wheel track: 6,60 m
 Maneuver wheel track: 2,50 m
 Wheels height: 0,84 m
 Blade height: 1,00 m
 Coupling hook hight: 0,50 m
 Estimated weight: 5.500 kg
 Frame design: with double plates
 Opening blade system: hydraulic
 Folding blade: yes
 Extensible blade: no
 Opening axles system: batterfly
 Extensible axles: yes
 Oil filter: cartridge
 Rocker arm (wheels): n° 2 balancer with 3 wheels
 Slope of the blade: hydraulic
 Lights system: yes
 Receiver mast: n° 1 hydraulic extensible
 Earth volume per run: 10 m³
 Finishing speed (km/h): 12 km/h
 Transport distance (m): 110 m
 Laser system: hydraulic indipendent
 Ready for laser system: yes
 Ready for GPS system: yes
 Laser system precision on 450 m: ± 2 mm
 GPS system precision on 5 km: ± 10 mm

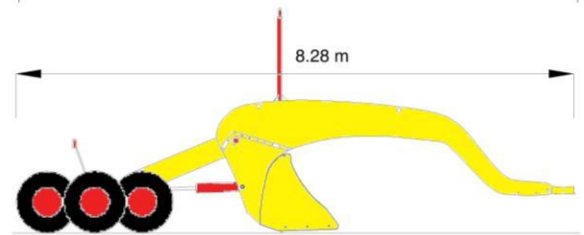


Overall length

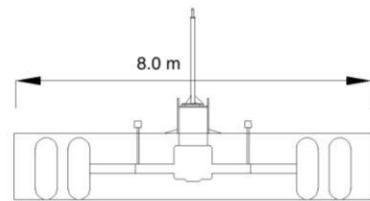


Working width



Maneuver width

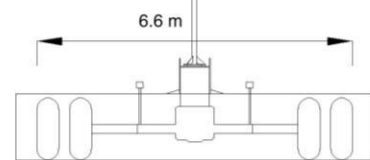

Work wheel track

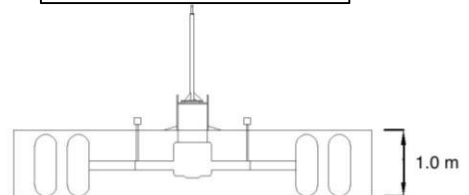

Blade height